

Asset Protection

Leading Warranty as Standard

- 1 Year Warranty Protection



AirCare Coverage

Ensure the highest level of satisfaction with the highly acclaimed, bumper-to-bumper, extended life care programme. Ask your authorized IR representative for more details.

Industry-Leading Performance

Specifications (50Hz)

MODEL NO	POWER kW	CAPACITY m ³ /min**	BAR AT DISCHARGE barg	dB(A)
UP5-15-7	15	2.41	7.5	68
UP5-15-8		2.36	8.5	68
UP5-15-10		2.07	10.0	68
UP5-15-14		1.61	14.0	68
UP5-18-7	18.5	3.00	7.5	68
UP5-18-8		2.85	8.5	68
UP5-18-10		2.61	10.0	68
UP5-18-14		2.01	14.0	68
UP5-22-7	22	3.54	7.5	69
UP5-22-8		3.34	8.5	69
UP5-22-10		3.11	10.0	69
UP5-22-14		2.32	14.0	69
UP5-30-7	30	5.60	7.5	69
UP5-30-8		4.90	8.5	69
UP5-30-10		4.70	10	69
UP5-30-14		3.90	14	69
ML37-PE	37	6.20	7.5	69
MM37-PE		6.00	8.5	69
MH37-PE		5.70	10	69
MXU37-PE		4.80	14	69

60Hz IR 50-PE Performance

Free Air Delivery - cfm (**)

HP	HF	EP	HHP	HXP	Length (in)	Width (in)	Height (in)	Weight (lbs)
50-PE	115 psig	125 psig	150 psig	200 psig	67.4	54.1	52.9	2476

**Capacity quoted tested in accordance with ISO 1217 annex C 1996 (CAGI-pneurop PN2CPT2)

*Sound levels per ISO 2151; 2004 annex C

Ultra-Plus Coolant


All units come standard with Ingersoll Rand's Ultra-Plus advanced synthetic coolant:

- 9,000 hour extended coolant life
- Simple condensate separation
- High level of biodegradability



Ease Of Service

Ingersoll Rand designed the UP-Series package with ease of service in mind. Spin-on filter and separator element along with 3/6/9,000 hour/annual service intervals make life simple. Your IR Air Solutions provider will recommend the most cost effective maintenance program to keep your investment operating trouble free for years.

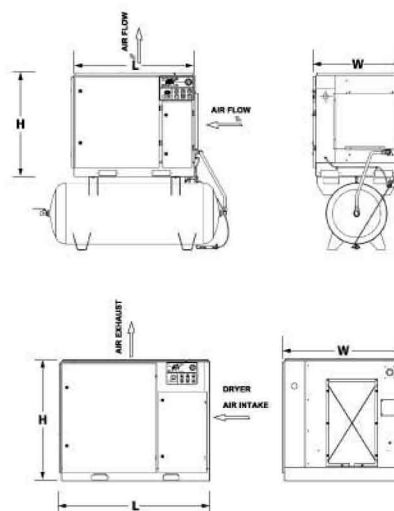

Dimensions & Weights (50Hz)

Power kW	L (mm)	W (mm)	H (mm)	WEIGHT (kg)
15	1282	920	1050	509
18.5	1282	920	1050	532
22	1282	920	1050	540
30	1712	1379	1344	1028
37	1712	1379	1344	1064