

# Performance That Pays


### **Boost Your Profitability**

Boosting your company's profits was the main goal that Ingersoll Rand had in mind when designing the revolutionary UP-Series line of integrated rotary screw air solutions.

The UP-Series is more than an integrated air system, it's a complete air solution designed to maximize the key drivers of profitability in today's business:

- ·Ultimate reliability
- ·Shop productivity
- ·Flexibility of operation
- · Energy efficiency and savings

Welcome to Ingersoll Rand's UP-Series Rotary Air Solutions, a New Standard of Performance.





## Exceptional Value

#### **Ultimate Reliability**

Maximum Uptime

Ingersoll Rand is so confident in the performance of the UP-Series, with a one year package warranty.

**Fewer Connections** 

Smart integration eliminates leaks and pressure drops, maximizing reliability.

#### **Ultimate Efficiency**

More Air For Your Money

Industry leading performance delivers more air for less horsepower, saving thousands of RMB per year on energy.

Smart, Energy Efficient Controls

Eliminates wasteful unloaded running by unloading rapidly and by cycling the compressor on/off when not needed.

**Energy Efficiency** 

High efficiency IP55 enclosure main motor driving both compressor and cooling blower.

#### **Ultimate Flexibility**

Compact Footprint Design

Receiver mounting frees up valuable floor space and reduces install costs.

Installation Close To Point-of-Use


Whisper quiet operation allows for installation closer to point-of-use, reducing costs and ensuring a better, safer work environment.

#### **Ultimate Productivity**

**Closely Maintained Pressure** 

Reducing discharge pressure and avoiding excessive pressure bands, increases downstream tool and equipment life.














#### Innovation

High Efficiency Integrated Compression Module

- To provide maximum performance, efficiency and ease of service, the airend, interconnecting piping and separation system have all been integrated into one simple design. Integration of the compression module eliminates leaks and pressure losses to increase efficiency and performance.
- Service and maintenance are made extremely simple through spin-on filtration and separator cartridges.



## Real World Advantages

#### **Whisper Quiet Operation**

Oversized, high efficiency cooling air blower provides sound levels as low as 68-69 dBA.



### Poly-V Belt Drive

Premium drive system applies patented automatic tensioning to eliminate belt stretch and increase air output.



#### **Dual Control Operation**

Reliable and effective load/ noload control with automatic stop and restart facility for maximum flexibility.



#### **Advanced Cooling**

A package prefilter, efficient combination aftercooler with access to both sides for easy cleaning and top discharge to simplify ducting.



#### **Simple Diagnostics**

Visual indication of operating status and hours run, for ease of operation and reduced downtime.




#### **Generous Serviceability**

All key maintenance components have been grouped to provide ease of serviceability.



#### The Heat Stays Out. The Noise Stays In.

The 37kW/50HP is uniquely designed to keep the heat out of the package and the noise in. The combination of super-efficient cooling and noise reduction results in a compressor that will run in the most extreme conditions and still achieve maximum performance.

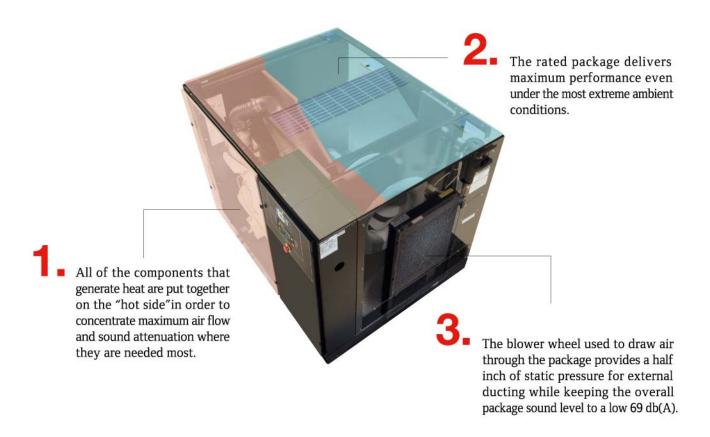

#### **Options To Meet All Operating Conditions**

#### Frost Protection

When site ambient conditions are expected to fall below freezing, IR offers separate field installation kits. For installation convenience, the thermostatically controlled frost protection kits are connected to separate singlephase power supplies and include space heaters and trace heating to protect the units down to temperatures as low as-10°C (14°F). Once the compressor is running, thermostatic controls switch off the heater circuits.

#### **Power Outage Restart**

In the event of a compressor power outage shutdown, Power Outage Restart will automatically provide a visual and audible warning once power is restored and will then automatically restart the compressor and return it to its previous operating condition.

#### High Ambient Package

Rated for operation in ambient conditions up to 122°F (50°C), the High Ambient units are available in power sizes of 15-30kW. As to 37kW the package enclosure is allowing adequate ventilation for operating in high ambient conditions (115°F./46°C.).

#### **Intellisys Control Option**

Probably the best known name in compressor control systems, the optional intellisys control offers precise pressure control, energy saving functions and advanced asset protection.



#### Outdoor Modification

To further protect the compressor from rainwater ingress, IR offers an intake louver for the pre-filter, and a discharge cowling for the cooling air outlet.

## Introduction the Ingersoll Rand 37kW

The quietest, most efficient, easiest-to-service air compressor in its class.

#### M37-PE

Reliability, efficiency, serviceability and low noise; everything you're looking for in a compressed air solution. All these unique qualities are available in a package specifically designed to deliver superior acoustic containment and optimum performance efficiency at 37 kW / 50 HP.

- The rugged, durable, time-proven lngersoll Rand airend delivers the ultimate in mechanical reliability.
- Low noise, high efficiency blower fan cooling allows for maximum cooling in ambients up to 46°C(115°F).
- The heavy duty, fully cast separator system is designed to last and allows for quick, simple coolant system maintenance.



 Integrated Intellysis control brings technology to the otherwise simple package design. The intellysis auto control select (ACS) automatically selects the optimum compressor operating mode to minimize energy costs.

### Reliability = Uptime + Fast Maintenance







### Asset Protection

#### **Leading Warranty as Standard**

· 1 Year Warranty Protection



· AirCare Coverage

Ensure the highest level of satisfaction with the highly acclaimed, bumper-to-bumper, extended life care programme. Ask your authorized IR representative for more details.

### Industry-Leading Performance

#### Specifications (50Hz)

MODEL NO	POWER	CAPACITY	BAR AT	dBA*	
_	kW	m³/min**	DISCHARGE barg		
UP5-15-7		2.41	7.5	68	
UP5-15-8	15	2.36	8.5	68	
UP5-15-10		2.07	10.0	68	
UP5-15-14		1.61	14.0	68	
UP5-18-7		3.00 7.		68	
UP5-18-8	18.5	2.85	8.5	68	
UP5-18-10	16.5	2.61	10.0	68	
UP5-18-14		2.01	14.0	68	
UP5-22-7		3.54	7.5	69	
UP5-22-8	22	3.34	8.5	69	
UP5-22-10		3.11	10.0	69	
UP5-22-14		2.32	14.0	69	
UP5-30-7		5.60	7.5	69	
UP5-30-8	20	4.90	8.5	69	
UP5-30-10	30	4.70	10	69	
UP5-30-14		3.90	14	69	
ML37-PE		6.20	7.5	69	
MM37-PE	27	6.00	8.5	69	
MH37-PE	37	5.70	10	69	
MXU37-PE		4.80	14	69	


#### **Ultra-Plus Coolant**

All units come standard with lngersoll Rand's Ultra-Plus advanced synthetic coolant:

- · 9.000 hour extended coolant life
- · Simple condensate separation
- · High level of biodegradability

#### **Ease Of Service**

Ingersoll Rand designed the UP-Series package with ease of service in mind. Spin-on filter and separator element along with 3/6/9,000 hour/annual service intervals make life simple. Your IR Air Solutions provider will recommend the most cost effective maintenance program to keep your investment operating trouble free for years.





#### Dimensions & Weights (50Hz)

Power kW	L (mm)	W (mm)	H (mm)	WEIGHT (kg)	
15	1282	920	1050	509	
18.5	1282	920	1050	532	
22	1282	920	1050	540	
30	1712	1379	1344	1028	
37	1712	1379	1344	1064	

#### 60Hz IR 50-PE Performance

	Free Air Delivery - cfm ( ")							
UD	HF	EP	HHP	HXP	Length	Width	Height	Weight
HP	115 psig	125 psig	150 psig	200 psig	(in)	(in)	(in)	(ibs)
50-PE	219	215	205	170	67.4	54.1	52.9	2476

<sup>\*\*</sup>Capacity quoted tested in accordance with ISO 1217 annex C 1996 (CAGI-pneurop PN2CPT2)

<sup>\*</sup>Sound levels per ISO 2151; 2004 annex C



Ingersoll Rand Industrial Technologies provides products, services and solutions that enhance our customers' energy efficiency, productivity and operations. Our diverse and innovative products range from complete compressed air systems, tools and pumps to material and fluid handling systems and environmentally friendly microturbines. We also enhance productivity through solutions created by Club Car®, the global leader in golf and utility vehicles for businesses and individuals.

#### Authorised Distributor:



#### Pansar Company Sdn. Bhd. 196501000061 (50977M)

Wisma Pansar, 23-27 Jalan Bengkel, P.O.Box 319, 96007 Sibu, Sarawak. **T** +6084-333 366 **F** +6084-314 555 **E** marine.industrial@pansar.com.my **W** pansar.com.my

#### **Kuala Lumpur Regional Office**

No. 7 Jalan Astaka, U8/84, Bukit Jelutong Industrial Park, Seksyen U8, 40150 Shah Alam, Selangor.  $\bf T$  +603-7845 3366  $\bf F$  +603-7846 9031

 Kuala Lumpur
 +603-7845
 3366
 Johor Bahru
 +607-562
 5166
 Muar
 +606-951
 0386

 Ipoh
 +605-282
 6382
 Penang
 +604-530
 2417
 Sibu
 +6084-322
 022
 Kuching
 +6082-244
 155

 Bintulu
 +6086-331
 720
 Miri
 +6085-424
 716
 Kota Kinabalu
 +6088-218
 811
 Sandakan
 +6089-217
 799

 Tawau
 +6089-776
 355
 Lahad Datu
 +6089-886
 355
 Brunei
 +673-223
 3641
 Singapore
 +65-6353
 3933



Ingersoll Rand compressors are not designed, intended or approved for breathing air applications. Ingersoll Rand does not approve specialized equipment for breathing air applications and assumes no responsibility or liability for compressors used for breathing air service.

Nothing contained on these pages is intended to extend any warranty or representation, expressed

Nothing contained on these pages is intended to extend any warrantly or representation, expressed or implied, regarding the product described herein. Any such warranties or other terms and conditions of sale of products shall be in accordance with Ingersoll Rand's standard terms and conditions of sale for such products, which are available upon request.

Product improvement is a continuing goal at Ingersoll Rand. Designs and specifications are subject to change without notice or obligation.